


# SU-660

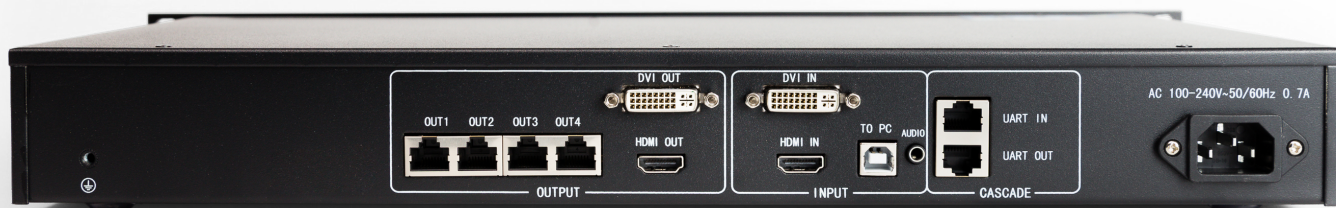

## OVERALL SPECIFICATIONS

Input Power	AC 100-240, 50/60Hz
Rated Power Consumption	16W
Weight (kg / lbs)	3.6 / 7.93
Dimensions (mm/in)	482 x 250 x 55.56 / 18.97 x 9.84 x 2.18
Rack Spaces	1.5U
Inputs	HDMI, DVI
Outputs	HDMI, DVI

This is our most popular Sending Controller. It is the latest independent master control unit powered by NovaStar. The built in LCD display offers greater effectiveness and unparalleled flexibility. This entirely eliminates the need to carry a PC. It also supports Nova's new generation point-by-point correction technology; the correction is fast and efficient, and allows users to mix and match older panels, and/or maximize the potential of their LED Screen.

## PRODUCT FEATURES:

- LCD screen allows setup without a computer and access to full screen adjustments
- 1.5 space rack mountable units
- Supports multiple input resolutions
- DVI and HDMI input and output sources
- 4 CAT5 ethernet outputs for redundancy and multiple LED displays