

ReFLEXion

Mobile and Interlinking All-in-One dvLED

The reFLEXion LED stand is a visually striking, self-contained, turnkey display perfect for commercial video display needs. Its sleek, slim, and simple design allows for mobility throughout your space and maximum eyes on your content.

Consider this the dynamic replacement for your traditional pop-up print signage.



Advantages



FREE
STANDING



THIN
DESIGN



WIFI
ENABLED



LIGHTWEIGHT



RENTAL
& FIXED
INSTALL



INDOOR




ANDROID
& IOS
COMPATIBLE

Product Features

Multiple Size Display Options

Indoor ReFLEXions can be connected together to create larger, seamless solutions - perfect for rental staging and tradeshow applications.

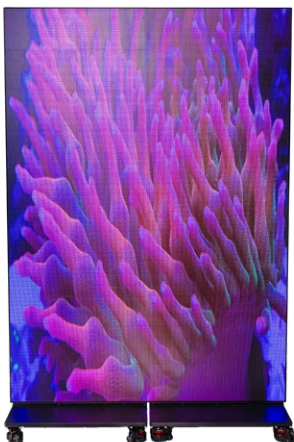

Message Promotion

Elevate your display in ultra-high resolution throughout any commercial, hospitality, retail or entertainment environment.

Customized Frames

Everyone's brand is unique, and reFLEXion can be customized to reflect that.

Multiple Mounting Solutions

Knowing that each installation and use is different for a customer, reFLEXion can be easily wall mounted both horizontally and vertically, as well as be a free-standing display with its one-of-a-kind base.



Plug & Play

Enjoy the privilege of watching or screening your own video, audio, pictures, HDMI/USB/smartphone connectivity options without the need for an external control unit.

AVEDA

WILD AT HEART

JON ALAN SALON

Nashville, Tennessee
ReFLEXion Pixel Pitch - 2.5mm

NURTURE BODY
HANDS & FEET



reFLEXion SPECIFICATIONS

Pitch	1.8		2.5
Pixels/Sq M	284,444		160,000
LED Type	SMD 1515 with TOP COB		Flip Chip 1010 with GOB
Pixel Matrix	320 x 900	320 x 540	240 x 675
Nits	800	800	3000-3500
Weight (Kg/lbs) Without Base	35/77	21/46.3	35/77
Refresh Rate Hz	3840Hz		
Scan Rate*	1/30		1/32
Unit Width (mm)	600		
Unit Height (mm)	1687.5	1012.5	1687.5
Unit Depth (mm)	30		
Viewing Angle (Horizontal)	160		
Viewing Angle (Vertical)	160		
Input Voltage	AC100~240		
Watts/m2 Max	600	360	850
Grey Scale	12 bit		13 bit
Control	Colorlight		
Serviceability	Front Serviceable		
Operating Temp	-10°C~+40°C		
IP Rating	IP41		
Certifications	CE, ETL, FCC, RoHS		

*Additional scan rate options available upon request. All specifications are property of PixelFLEX LLC., and are subject to change without notice. Please verify specifications and information before final sale.